


Standard / Norm : SRPS EN 10058:2003
Materijal / Material : S235JR; S275JR; S355JR
ili po zahtevu klijenta / or at client's request

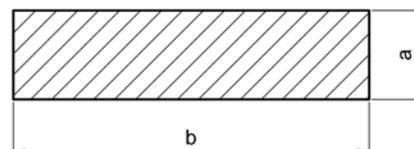

Širina / Width		Masa / Mass [kg/m]																	
		Debljina / Thickness																	
b		a																	
[mm]		[mm]																	
		5	6	7	8	10	12	14	15	16	18	20	25	30	35	40	45	50	60
uske ravne šipke / narrow flat bars	20	0.785	0.942	1.1	1.26	1.57	1.88	2.2	2.36										
	25	0.981	1.18	1.37	1.57	1.96	2.36	2.75	2.94	3.14	3.53								
	30	1.18	1.41	1.65	1.88	2.36	2.83	3.3	3.53	3.77	4.24	4.71							
	35	1.37	1.65	1.92	2.2	2.75	3.3	3.85	4.12	4.4	4.95	5.5	6.87						
	40	1.57	1.88	2.2	2.51	3.14	3.77	4.4	4.71	5.02	5.65	6.28	7.85	9.42					
	45	1.77	2.12	2.47	2.83	3.53	4.24	4.95	5.3	5.65	6.36	7.07	8.83	10.6					
	50	1.96	2.36	2.75	3.14	3.93	4.71	5.5	5.89	6.28	7.07	7.85	9.81	11.8	13.7				
	55	2.16	2.59	3.02	3.45	4.32	5.18	6.04	6.48	6.91	7.77	8.64	10.8	13	15.1				
	60	2.36	2.83	3.3	3.77	4.71	5.65	6.59	7.07	7.54	8.48	9.42	11.8	14.1	16.5	18.8			
	65	2.55	3.06	3.57	4.08	5.1	6.12	7.14	7.65	8.16	9.18	10.2	12.8	15.3	17.9	20.4	23		
	70	2.75	3.3	3.85	4.4	5.5	6.59	7.69	8.24	8.79	9.89	11	13.7	16.5	19.2	22	24.7	27.5	
	75	2.94	3.53		4.71	5.89	7.07		8.83	9.42		11.8	14.7	17.7	20.6	23.6			
	80	3.14	3.77	4.4	5.02	6.28	7.54	8.79	9.42	10	11.3	12.6	15.7	18.8	22	25.1	28.3	31.4	
	90	3.53	4.24	4.95	5.65	7.07	8.48	9.89	10.6	11.3	12.7	14.1	17.7	21.2	24.7	28.3	31.8	35.3	
	100	3.93	4.71	5.5	6.28	7.85	9.42	11	11.8	12.6	14.1	15.7	19.6	23.6	27.5	31.4	35.3		
	110	4.32	5.18	6.04	6.91	8.64	10.4	12.1	13	13.8	15.5	17.3	21.6	25.9	30.2	34.5			
	120	4.71	5.65	6.59	7.54	9.42	11.3	13.2	14.1	15.1	17	18.8	23.6	28.3					
	130				8.16	10.2	12.3	14.3	15.3	16.3	18.4	20.4	25.5	30.6	35.7	40.8	45.9	51	62.2
	140				8.79	11	13.2	15.4	16.5	17.6	19.8	22	27.5	33	38.5	44	49.5	55	65.9
ravne šipke / flat bars	150				9.42	11.8	14.1	16.5	17.7	18.8	21.2	23.6	2.4	35.3	41.2	47.1	53	58.9	70.7
	160				10.1	12.6	15.1	17.6	18.8	20.1	22.6	25.1	31.4	37.7	44	50.2	56.5	62.8	75.4
	170				10.7	13.3	16	18.7	20	21.4	24	26.7	33.4	40	46.7	53.4	60.1	66.7	80.1
	*180				11.3	14.1	17	19.8	21.2	22.6	25.4	28.3	35.3						
	*200				12.6	15.7	18.8	22	23.6	25.1	28.3	31.4	39.3	47.1	55	62.8			
	*220					17.3	20.7		25.9			34.5	43.2	51.8	60.4	69.1			
	*250					19.6	23.6		29.4			39.3	49.1	58.9	68.7	78.5			
	*300					23.6	28.3		35.3			47.1	58.9	70.7	82.4	94.2			
	*350					27.5	33		41.2			55	68.7	82.4	96.2	110			
	*400					31.4	37.7		47.1			62.8	78.5	94.2	110	126			